



V600

AW-RATED UPVC VINYL SERIES

Terrace Door



Product Material
uPVC Vinyl



Frame Depth
3 1/4"



Rating
Outswing: AW50



4UP Apartments
West Lafayette, IN
Developer: Tomish Developers LLC
Contractor: Integrate Build, LLC
Architect: ARKOR
Comm. Window Dist.: G2 Architectural

Design Pressure Outswing: 50	U-Value Outswing: .21 – 0.30
Air Infiltration Outswing: <.30	SHGC Outswing: .09 – .24
Water Resistance Outswing: 7.5	CRF Outswing: 45–64
OITC* Outswing:	STC* Outswing:

U-Value and SHGC ranges are NFRC certified based on I.G. combinations incorporating some or all the following: Low-E glass, clear glass, argon gas and/or air fill, and grids
*-Contact Quaker for STC & OITC information

FEATURES:

- ▶ Extruded, architectural grade uPVC vinyl frame
- ▶ 1" insulating glass
- ▶ Outswing single-panel operation
- ▶ Standard Widths: 2⁸, 3⁰, 3² (for 32" clear opening), 3⁶
- ▶ Standard heights: 6⁸, 6¹⁰, 8⁰
- ▶ Max sizing: 48" x 96"
- ▶ Minimum sizing: 32" x 72"
- ▶ ADA threshold w/10" bottom rail
- ▶ Multi-point hardware
- ▶ Keyed hardware
- ▶ White or Sandstone uPVC vinyl
- ▶ Optional painted exterior (meets FGIA 615 finish)
- ▶ Textured laminate options for exterior and interior

www.QuakerCommercialWindows.com

Information listed is deemed accurate as of date shown. Quaker Windows reserves the right to change or discontinue any product, feature or option without notice.



June, 2026 V1



V600

AW-RATED uPVC VINYL SERIES

V600 Terrace door
Outswing /ADA sill

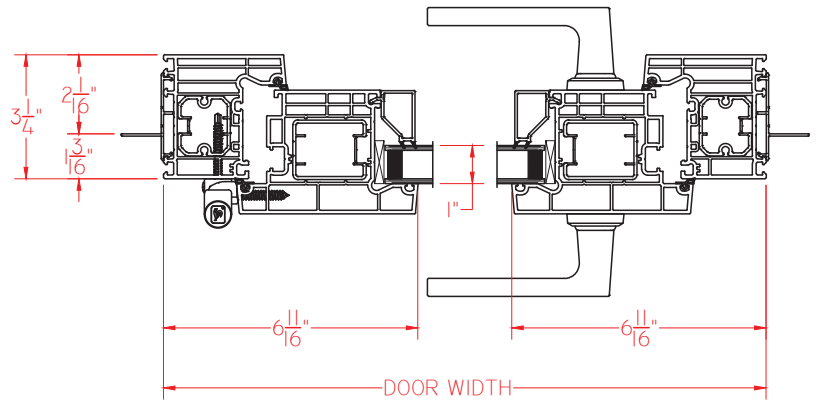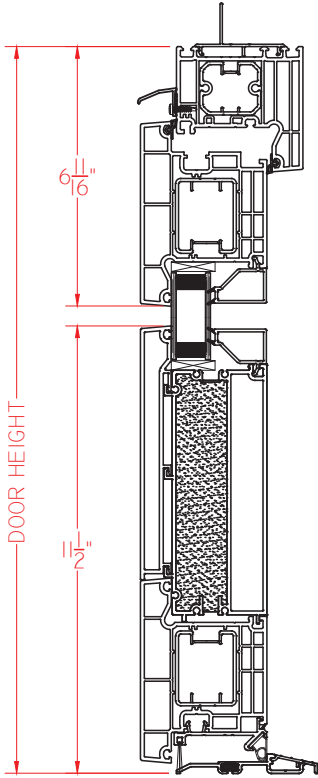

The Cord
Austin, TX
Developer: Pearstone Partners
Contractor: Summit Design+ Build
Architect: STG Design
Comm. Window Distributor: XL Building Prod.



QuakerCommercialWindows.com
1-800-347-0438
Commercial@quakerwindows.com