

# Single Hung | Double Hung | Horizontal Slider | Fixed







Rating
Single Hung: R35
Double Hung: R40
Slider: R40, LC25
Fixed: up to CW50



Design Pressure Single Hung: 35 Double Hung: 40 Slider: 40 Fixed: Up to 50	U-Value* Single Hung: .2552 Double Hung: .2451 Slider: .2552 Fixed: .2251
Air Infiltration Single Hung: <.30 Double Hung: <.30 Slider: <.30 Fixed: <.10	SHGC* Single Hung: .1262 Double Hung: .1162 Slider: .1262 Fixed: .1265
Water Resistance Single Hung: up to 5 Double Hung: up to 5 Slider: up to 6 Fixed: 7.5	* CR* Single Hung: 31 - 60 Double Hung: 31 - 59 Slider: 31 - 59 Fixed: 30 - 62
OITC* Single Hung: 27 Double Hung: Contact Quaker Slider: 24-28 Fixed: Contact Quaker	STC <sup>x</sup> Single Hung: 29 – 35 Double Hung: Contact Quaker Slider: 29 – 31 Fixed: Contact Quaker
*-Ranges based on multiple Low-E/Argon I.G. combinations	

x-Ranges based on multiple I.G. combinations

## **FEATURES:**


- Versatile vinyl window series with built-in budgetary advantages
- ► ¾" insulating glass
- Mitered and welded corners
- ► Integral nail fin
- ► Block & Tackle balancers in Hung models
- Brass rollers with stainless steel axle pins (Sliding model)
- Metal reinforcements added for additional strength
- Numerous mull systems for multi-unit combos
- White or Sandstone vinyl
- White and Sandstone vinyl (exterior/interior)
- Optional painted exterior (meets FGIA 615 finish)
- Textured laminate options for exterior and interior
- ▶ Use up to 4 floors.




# **COMMERCIAL VINYL SERIES**

## Single Hung (R35)


Test size = 40" x 63"

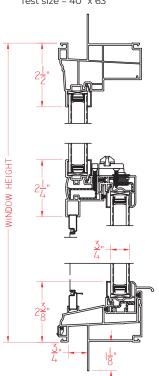

### Double Hung (R35)

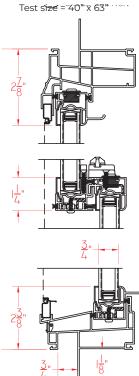


All ratings listed are NAFS certified.



#### Horizontal Slider (R35)

Test size = 63" x 44"







QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com