



E600 Series With Blinds/Storm Panel 31/411 Frame Depth Fixed (Picture Window)

E600 Series Fixed (Picture Window)

with Blinds/Storm Panel

Features

- ◊ Commercial Framing System
 - 31/4" main frame
 - Sealable corner keys
 - Screw connections
 - 0.094" wall thickness of interior and exterior walls, 0.070" wall thickness elsewhere
- ♦ Enhanced Design
 - Azon pour and debridge thermal break is ½" wide in all main frame and vent rail extrusions
 - Clean squared edges
 - 2" narrow sitelines
 - Blinds/Storm Panel applied to interior
- ♦ Glazing
 - 1" insulating glass

Benefits

- The capacity to match exterior colors for unique project facades
- The ability to facilitate large sizes for taller and wider window openings

Performance

 Structural & Thermal (test reports or thermal simulations available upon request)

Model	Fixed (Picture Window)
Test Size	60" x 99"
NAFS Rating	AW-100
Structural Load P.S.F.	150
Air at 50 MPH (cfm/ft²)	<0.10
Water (No Penetration) P.S.F.	up to 15
U-Value (ranges based on multiple Low-E/Argon combinations)	0.18-0.51
SHGC (ranges based on multiple Low-E/Argon combinations)	0.11-0.67

Due to periodic re-certification requirements, result shown may vary.

Options


- Available Configurations
 - Fixed
 - Wire frame capabilities
- Muntin Choices
 - Internal or simulated divided lites available
- Nailing Fin
- > Glazing
 - Multiple Low-E and argon glazing choices Capillary tubes
 - Wide variety of glazing, tinting and thickness options
- ♦ Panning & Trim Choices
 - Wide variety of panning, receptor and trim available
- Mulling
 - Wide variety of structural mulls












E600 Series With Blinds/Storm Panel 31/4" Frame Depth Fixed (Picture Window)

E600 Series Fixed (Picture Window)


Shown with Blinds/Storm Panel


This document contains confidential and proprietary information intended for the private use of Quaker.

© 2016 Quaker Window Products Co., Inc. All rights reserved. Quaker reserves the right to change any/all designs without notice.

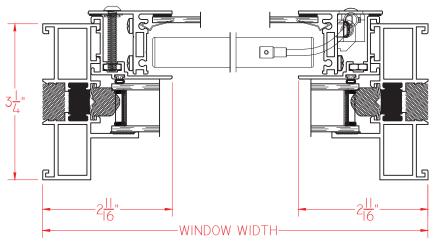





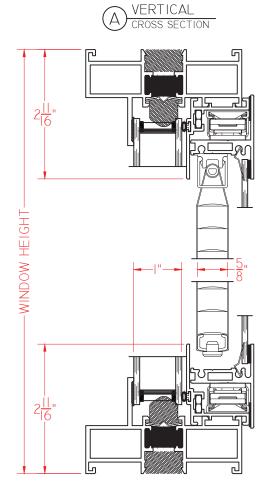

SCALE 1:2

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.





