



B600 Series 3 1/4" Frame Depth Fixed (Picture Window)

B600 Series Fixed (Picture Window)

Features

- ◇ **Commercial Framing System**
 - 3 1/4" main frame
 - Sealable corner keys
 - Crimp/Screw connections
 - 0.094" wall thickness of interior and exterior walls, 0.070" wall thickness elsewhere
- ◇ **Enhanced Design**
 - Azo-braided channel receives Azon pour and de-bridge thermal break which is 1/2" wide in all main frame and vent rail extrusions
 - Clean squared edges
- ◇ **Glazing**
 - 1" Insulating glass

Benefits

- ◇ The capacity to match exterior colors for unique project facades
- ◇ designed to meet ASTM F1642-04 (Standard Test Method for Glazing and Glazing System Subject to Airblast Loadings) resulting in a high GSA/ISC Performance Condition.
- ◇ The ability to facilitate large sizes for taller and wider window openings
- ◇ Modern appearance merged with superior structural integrity

Performance

- ◇ Structural & Thermal

Model	Fixed (Picture Window)			
Test Sizes	60" x 60"	72" x 120"	60" x 99"	48" x 120"
NAFS Rating	AW-PG80	AW-PG70	AW-PG50	AW-PG40
Structural Load P.S.F.	120.30	105.27	75.19	60.15
Air infiltration	<0.10			
Water (No Penetration) P.S.F.	12.11			
Missile Level	D			

Due to periodic re-certification requirements, result shown may vary.


- ◇ Blast Calculations Available for Project Specific Conditions

Options

- ◇ **Available Configurations**
 - Fixed
 - Continuous Frame (2 tall stack)
- ◇ **Commercial Framing System**
 - Continuous Frame Crossmember options consist of a wide 3" version or narrow 1 7/8" version
- ◇ **Muntin Choices**
 - Internal or simulated divided lites available
- ◇ **Nailing Fin**
- ◇ **Glazing**
 - Multiple Low-E and argon glazing choices
 - Triple glazing (Energy TG)
 - Capillary tubes
 - Wide variety of glazing, tinting and thickness options
- ◇ **Panning & Trim Choices**
 - Wide variety of panning, receptor and trim available
 - Jamb filler

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.






B600 Series 3 1/4" Frame Depth Fixed (Picture Window)

Shown with
nailing fin


B600 Series Fixed (Picture Window)

This document contains confidential and proprietary information intended for the private use of Quaker.
© 2016 Quaker Window Products Co., Inc. All rights reserved.
Quaker reserves the right to change any/all designs without notice.

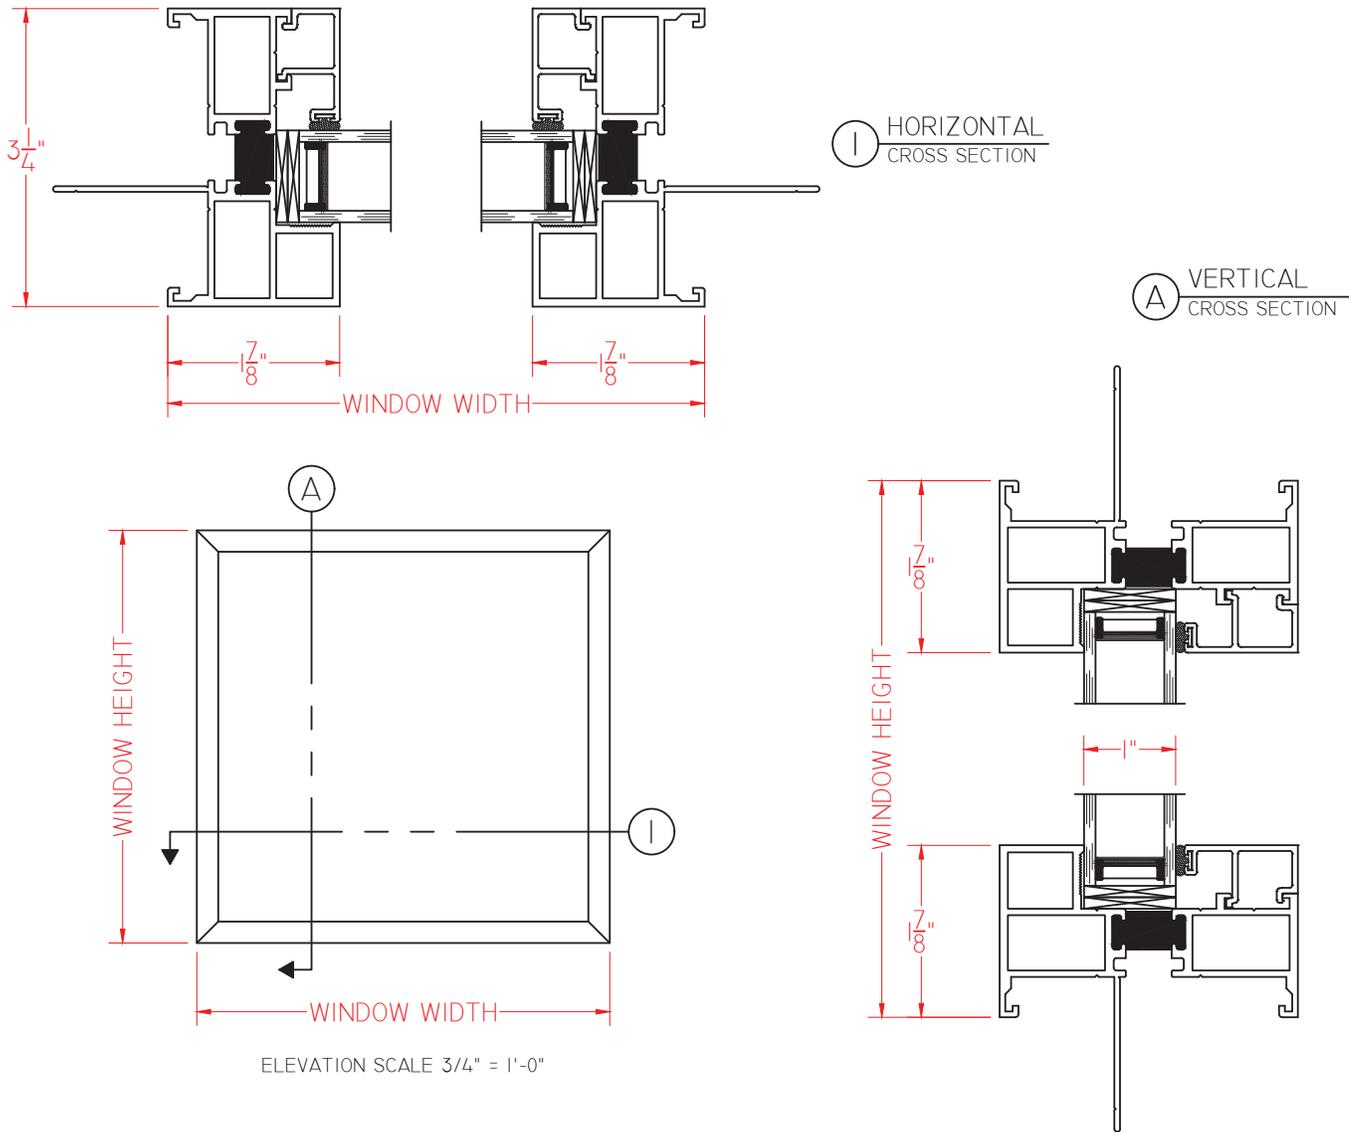

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.







B600 Series 3 1/4" Frame Depth Fixed (Picture Window)

B600 Series Fixed (Picture Window)

Shown with Double-Jamb Crossmember
with Narrow 1 7/8" sightline,
and without nailing fin

This document contains confidential and proprietary information intended for the private use of Quaker.
© 2016 Quaker Window Products Co., Inc. All rights reserved.
Quaker reserves the right to change any/all designs without notice.

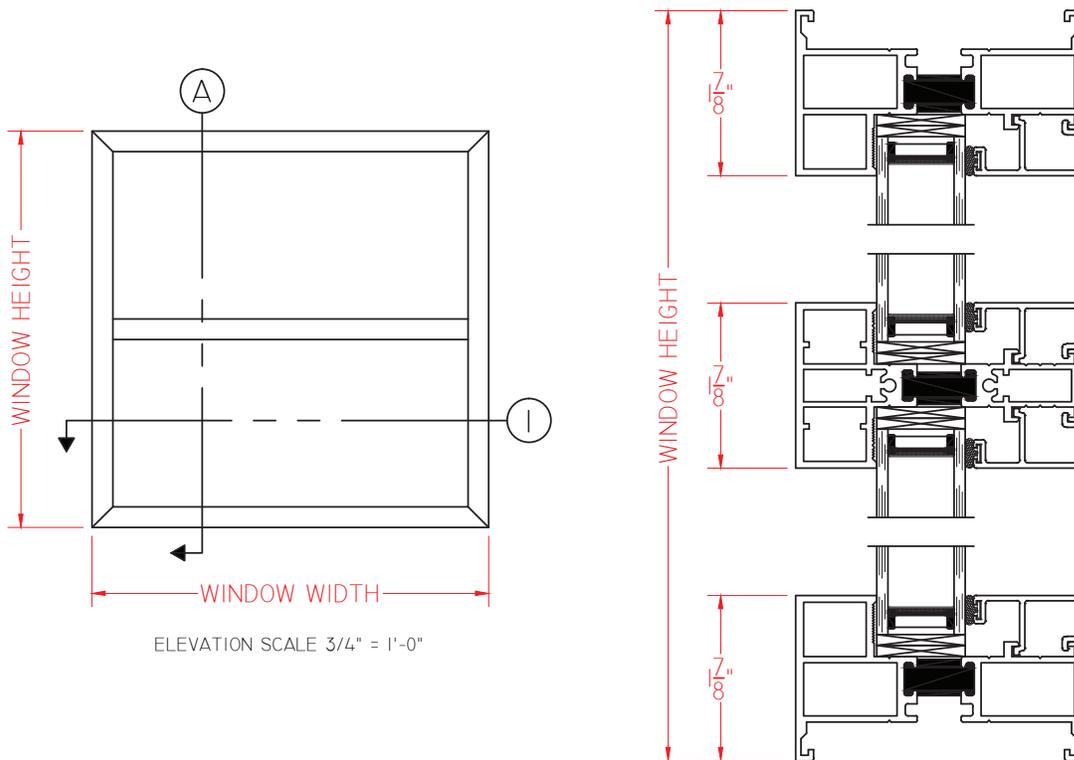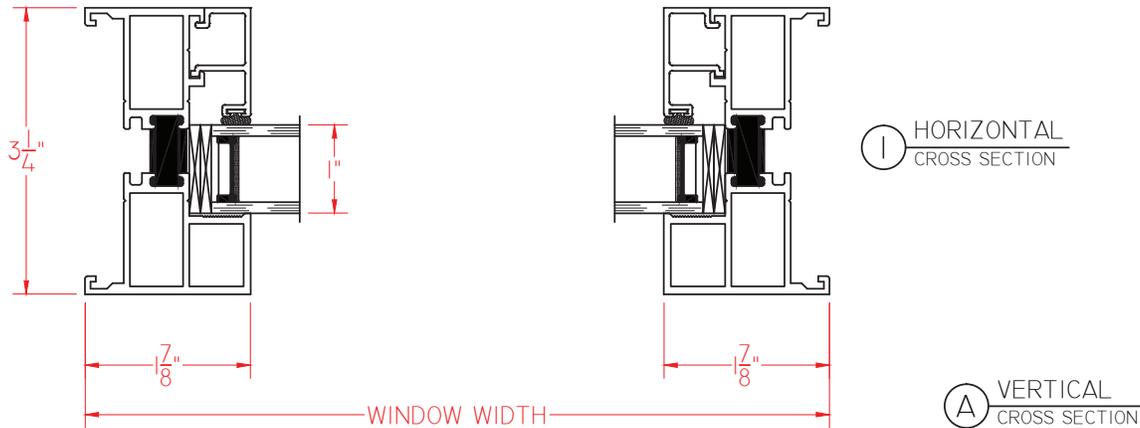

SCALE 1:2

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.

