

V150 Series Fixed (Picture Window)

Features

♦ Framing System

• 2³/₄" main frame

♦ Enhanced Design

- Mitered and welded corners
- Integral Nailing fin

♦ Glazing

• ¾'' insulating glass

Ocolors

• White and Sandstone vinyl (interior/exterior)

Benefits

- Perfect value-engineered product for commercial projects 3-stories and less
- ♦ Integral Nail Fin system allows the V150 Series to adapt to any project's build

Options

Available Configurations

• Picture Window

Muntin Choices

- 5/8" Internal lites available
- ♦ J-Channel Snap-on Trim

♦ Glazing

- EnergyBasic Low-E Glass
- Energy 3S Low-E glass
- Capillary tubes

Mulling

Choose from standard zero mull or ½" structural mull

Color

- High-performance Textured Black laminate (exterior only with White vinyl interior)
- Limitations on availability may apply

Performance

 Structural & Thermal (test reports and thermal simulations available upon request)

Model	Fixed (Picture Window)
NAFS Rating	R-40
Test Size	60" x 60"
Structural Load P.S.F.	60
Air Infiltration (cfm/ft²)	<0.10
Water Resistance (P.S.F.)	6
CR (Condensation Resistance) (with EnergyBasic or Energy 3S glass package)	37-63
U-Value (with EnergyBasic or Energy 3S glass package)	.2239
SHGC (with EnergyBasic or Energy 3S glass package)	.1535

Due to periodic re-certification requirements, result shown may vary.


Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.












V150 Series Fixed (Picture Window)

This document contains confidential and proprietary information intended for the private use of Quaker.

© 2019 Quaker Window Products Co., Inc. All rights reserved.

Quaker reserves the right to change any/all designs without notice.

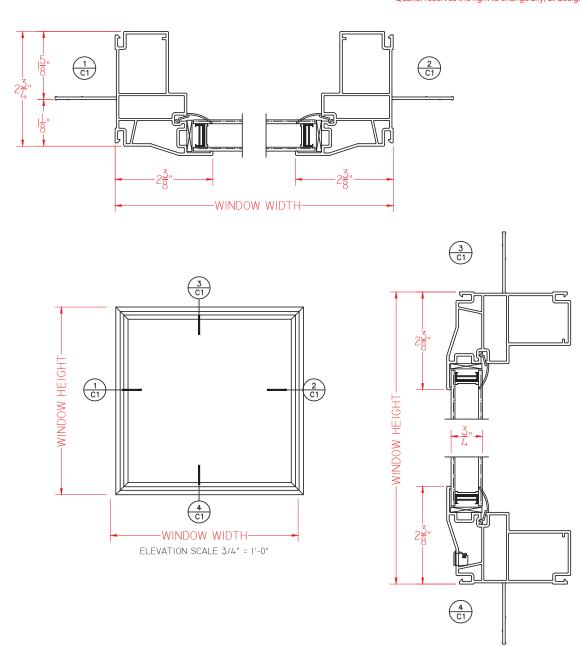

SCALE 6"=1'-0"

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.

8/2025 - V6





