

V200 Series 3 1/4" Frame Depth Fixed (Picture Window)

V200 Series Fixed (Picture Window)

Features

- ♦ **Commercial Framing System**
 - 3 1/4" main frame
 - 0.060" wall thickness of frame, 0.070" wall thickness of sash
- ♦ **Enhanced Design**
 - Mitered and welded corners
- ♦ **Glazing**
 - 3/4" insulating glass
 - SSB Glass
- ♦ **Colors**
 - White or Sandstone vinyl (interior/exterior)

Benefits

- ♦ The capacity to match exterior colors for unique project facades
- ♦ The ability to facilitate large sizes for taller and wider window openings

Performance

- ♦ Structural & Thermal (test reports or thermal simulations available upon request)

Options


- ♦ **Available Configurations**
 - Picture window
 - Geometric shapes
- ♦ **Muntin Choices**
 - Internal or simulated divided lites available
- ♦ **Nailing Fin**
- ♦ **Glazing**
 - Multiple Low-E and argon glazing choices
 - Capillary tubes
 - Wide variety of glazing, tinting and thickness options
- ♦ **Panning & Trim Choices**
 - Wide variety of panning, receptor and trim available
- ♦ **Mulling**
 - Wide variety of structural mulls
- ♦ **Colors**
 - High-performance Textured Black laminate (interior/exterior)
 - High-performance Textured Black, Textured Dark Bronze, Textured Dark Grey or Textured Resembles Clear Anodized laminate (exterior only with White vinyl interior)
 - Twelve painted exterior colors (with White or Sandstone vinyl interior)
 - Unlimited custom painted exterior colors

Model	Fixed (Picture Window)	Fixed Casement (Picture Window)	Direct Set Narrow Fixed (Picture Window)
NAFS Rating	R-35	R-40	CW-50
Test Size	48" x 48"		60" x 60"
Structural Load P.S.F.	52.5	60	75
Air Infiltration (cfm/ft ²)	<0.10	<0.10	<0.10
Water (No Penetration) P.S.F.	5.43	6	7.5
U-Value (ranges based on multiple Low-E/ Argon combinations)	0.22-0.51	0.22-0.49	0.22-0.47
SHGC (ranges based on multiple Low-E/ Argon combinations)	0.12-0.65	0.11-0.62	0.12-0.67

Due to periodic re-certification requirements, result shown may vary.

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.






V200 Series 3 1/4" Frame Depth Fixed (Picture Window)

V200 Series Fixed (Picture Window)


This document contains confidential and proprietary information intended for the private use of Quaker.
© 2016 Quaker Window Products Co., Inc. All rights reserved.
Quaker reserves the right to change any/all designs without notice.

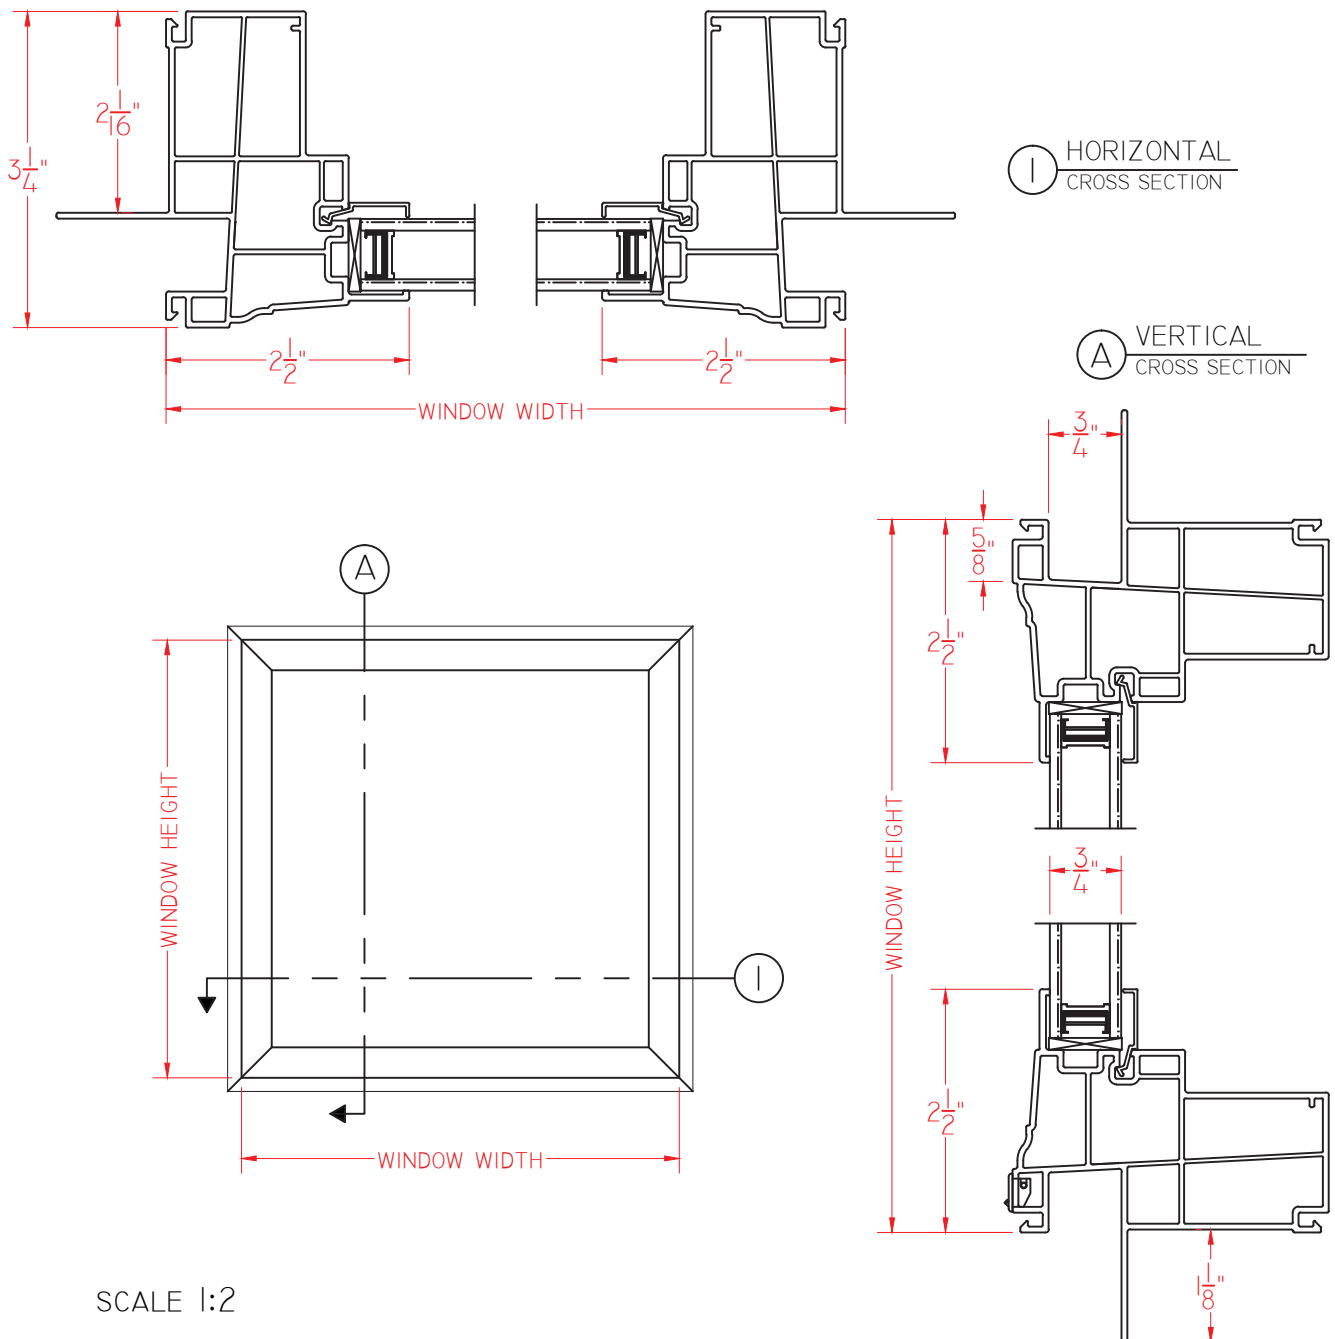

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.




WINDOW & DOOR
MANUFACTURERS ASSOCIATION
WDMA
M E M B E R




V200 Series 3 1/4" Frame Depth Fixed (Picture Window)

V200 Series Casement Fixed (Picture Window)

This document contains confidential and proprietary information intended for the private use of Quaker.
© 2016 Quaker Window Products Co., Inc. All rights reserved.
Quaker reserves the right to change any/all designs without notice.

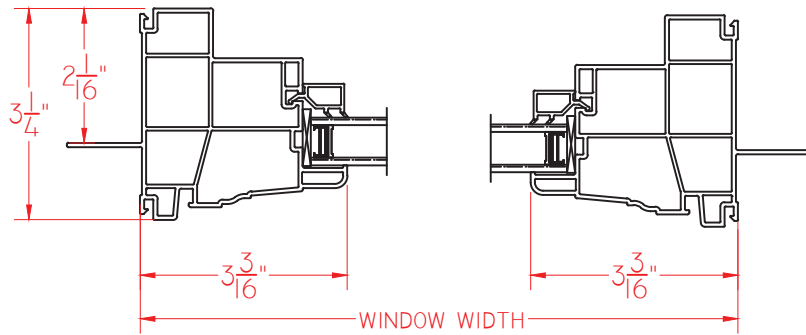


① HORIZONTAL
CROSS SECTION

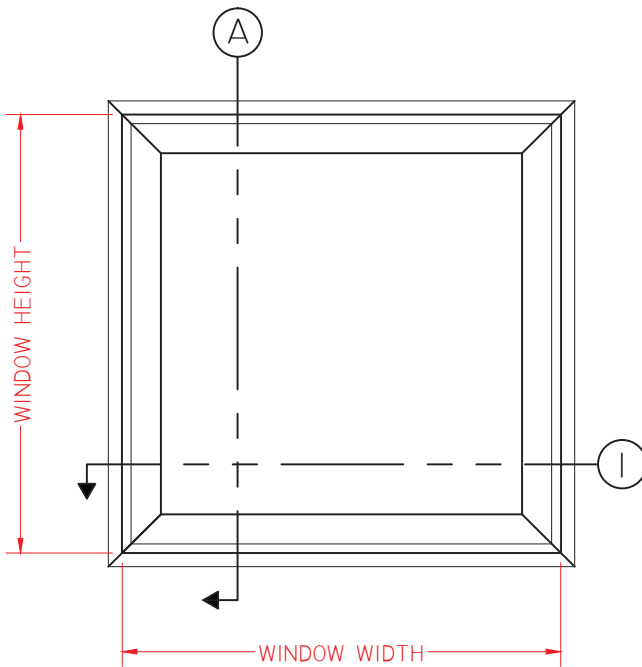

ELEVATION SCALE 3/4" = 1'-0"


Ⓐ VERTICAL
CROSS SECTION

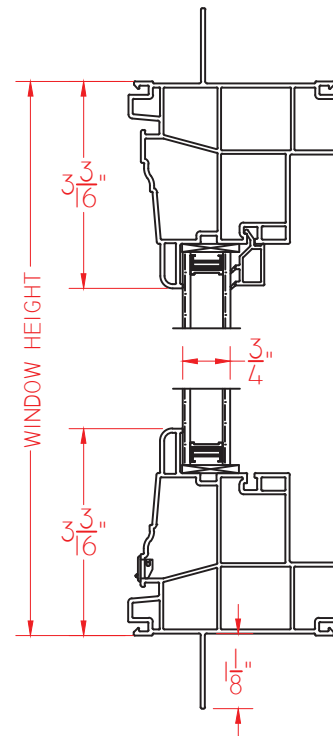

SCALE 1:3

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.







V200 Series 3 1/4" Frame Depth Fixed (Picture Window)

V200 Series Narrow Direct Set Fixed (Picture Window)


This document contains confidential and proprietary information intended for the private use of Quaker.
© 2017 Quaker Window Products Co., Inc. All rights reserved.
Quaker reserves the right to change any/all designs without notice.

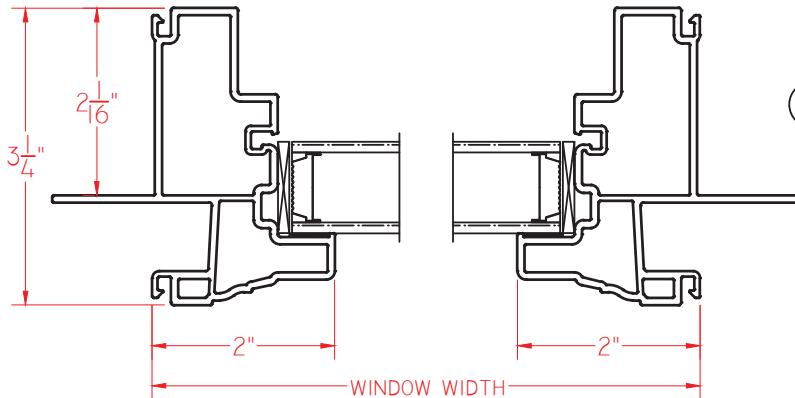

① HORIZONTAL
CROSS SECTION

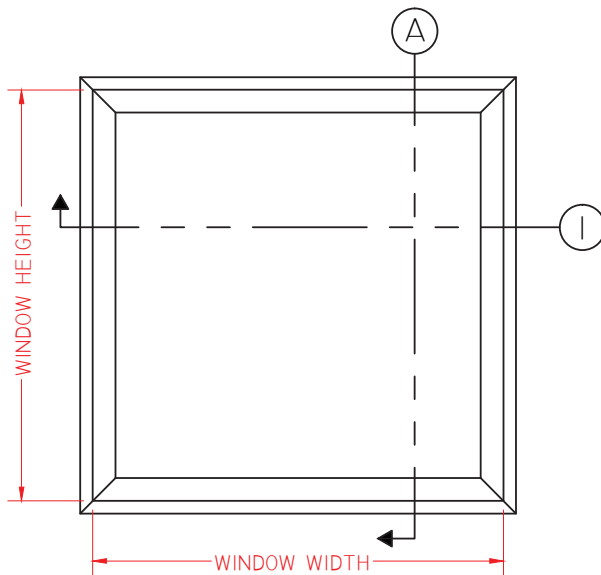

ELEVATION SCALE 3/4" = 1'-0"

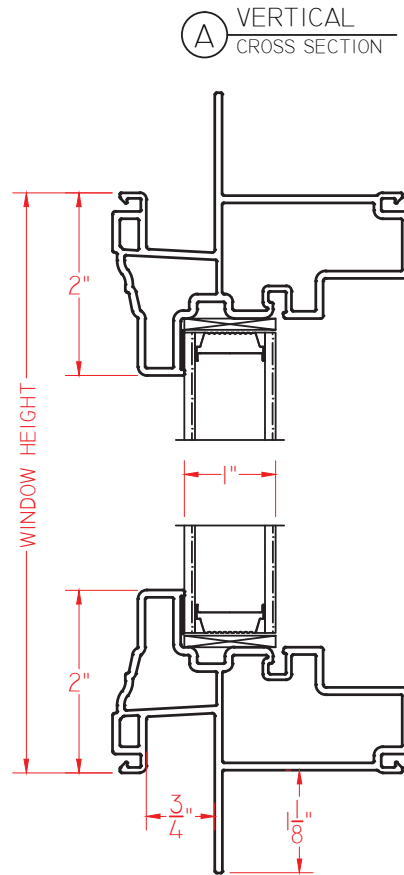

② VERTICAL
CROSS SECTION

SCALE 1:2

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.



WINDOW & DOOR
MANUFACTURERS ASSOCIATION
WDMA
M E M B E R